
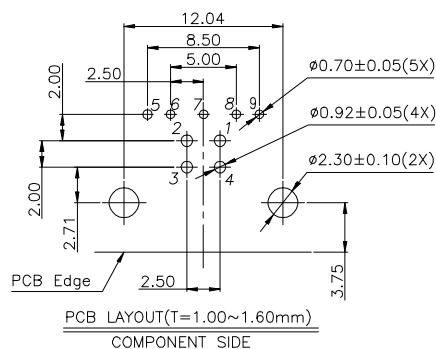








NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: LCP,UL94 V-0.
 - CONTACTS: COPPER ALLOY
 - FRONT SHELL: COPPER ALLOY
- PLATING SPECIFICATION:
 - TERMINAL: SEE PART NUMBER
 - FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 3.5Kgf MAX
 - REMOVAL FORCE: 1.02kgf MIN
 - DURABILITY: 1500 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING:
VBUS & GND PINS: 1.8A MAX.
OTHER PINS: 0.25A MAX.
 - LLCR:
VBUS & GND PINS : 30mΩ/PIN MAX.
ALL OTHER PINS: 50mΩ/PIN MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25℃ ~+85℃

Ordering Information


C	UGB205	-	09	XX	A	001	C	X	G	X
No. of Pins	Standard Plating		Color	Material						Standard Packing
09	75=Gold Flash/Matte Tin		1=Black 7=Blue	G=Phosphor						B=Tray
	Selective Plating									
	05=Gold Flash/Tin									



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 5.0'	X. ? .50
.X 3.0'	.X ? .38
.XX 2.0'	.XX ? .25
.XXX 1.0'	.XXX ?

DESIGNED:

DATE:

DWG. NO.

CUGB205-CA001

CHECKED:

DATE:

PART NO.

CUGB205-09XXA001CXGX

APPROVED:

DATE:

TITLE.

USB3.0 B TYPE Female
90度DIP 内弯脚 D款